Wembley®
SINCE 1952













PRODUCT PORTFOLIO

Quickfix
Joins everything except broken hearts!

WemLAC®

Wembley®
SINCE 1952



Brand Quickfix

People of all ages, in the most varied of situations and professions, users in the most diverse sectors, whether private or commercial, know QUICKFIX and consider QUICKFIX to be the solution to all their domestic, hobby related, school and professional adhesive needs. Most people begin using QUICKFIX from as early as primary school, for their art and craft needs. As they go through life, the QUICKFIX range of adhesives provides them satisfying solutions to all their DIY, Repair & Maintenance, and model making requirements.

About Wembley Laboratories Ltd.

Wembley Laboratories Ltd. embraces the entrepreneurial spirit of our founder, S. Amarjit Singh Lamba, and his core values of honesty, integrity, respect and responsibility.

In 1952, S. Amarjit Singh Lamba, developed India's first ready-to-use, transparent artificial resin adhesive. It reliably bonded all materials known at the time, even the first plastics such as Bakelit. This breakthrough adhesive was aptly named QUICKFIX, and it soon became the most preferred adhesive countrywide, to the extent that today its name is synonymous with the word adhesive.

The next three decades and more saw Wembley Labs Ltd consistently widen its horizons in terms of product range as well as distribution and marketing network. The turning point for the company came in 1994, when the 8th International Award for Quality was conferred on Wembley Laboratories Ltd. by the Editorial Office in Madrid, Spain.

Continuing the QUICKFIX tradition and relentlessly pursuing innovation, Wembley Laboratories Ltd has consistently moved on to newer vistas and today is India's leading adhesive manufacturer.

Wembley®
SINCE 1952



Quality Control

We at Wembley Laboratories Ltd. believe that the cardinal principle for achieving success is the adoption of stringent quality measures, ensuring unmatched superiority of products.
Samples of raw materials undergo chemical as well as physical tests on preventive basis.
We perform a multitude of tests throughout the manufacturing and packing process to ensure that all our products are manufactured to the very highest quality.
Rigorous testing, batch sampling and optimized storage procedures ensure that all our adhesives and sealants consistently meet your exact requirements. Each unit leaving the factory is subjected to rigorous testing and inspection.
Our team is totally committed towards continually improving the effectiveness of its Quality Management system

"Quality is never an accident but a result of high intentions, sincere efforts, intelligent direction and skillful innovation; it represents the wise choice of many alternatives."
- William A Forken

Innovation

Innovation and diversification are Wembley Laboratories Ltd's belief for future success. Our researchers constantly strive to develop many ideas, to make breakthroughs in the way people experience technology, resulting in the most effective solutions.

A fully equipped, state of the art R&D Laboratory occupies the pride of place at our manufacturing unit in Baddi. It has all the modern testing and measuring equipments. With a strong R&D team, we have developed and enhanced our products for consumers and industries.
Our R&D team is constantly striving at improving our existing products and building capabilities for new and innovative products in the future.





Robust Distribution Network

DISTRIBUTION NETWORK

E cient Distribution and loyal and dedicated distributors have been the cornerstone of our marketing success. Wembley Laboratories Ltd has over 150 Direct distributors reaching out to approximately 15,000 retailers, through the length and breadth of India, who are serviced by our advanced distribution system. This kind of vast networking helps us to reach and serve our customers better.

"A Customer is the most important visitor on our premises. He is not dependent on us. We are dependent on him. He is not an interruption in our work. He is the purpose of it. He is not an outsider in our business. He is part of it. We are not doing him a favor by serving him. He is doing us a favor by giving us an opportunity to do so."
Mahatma Gandhi



Wembley®
SINCE 1952





CUSTOMER SUPPORT

Customer Support

We understand that the quality of our Customer Support must match the quality of the products manufactured by us. Wembley Laboratories Ltd's dedicated team of experienced technical and application advisors are always available to offer customers a fast and effective response to application solutions and product support.

QUICKFIX ALL PURPOSE ADHESIVE

Quickfix is India's first indigenous all-purpose adhesive. It is a quick drying, clear and transparent adhesive which exhibits excellent bonding properties. Owing to its capacity to bond most substrates, it finds applications across various industries, and well as DIY and Household use.

AREA OF USAGE:

Joins a variety of materials such as glass, ceramic, earthenware, ivory porcelain, balsa wood, leathers, rubber, cork and most plastics like Acrylic, ABS polystyrene etc.

Used by Jewellery craftsmen for Minakari work & Fixing pearls and precious / semi-precious stones.

Widely used in speaker manufacturing industries.

Used in household repairs, aero modelling, model making and handicrafts.





FEATURES & BENEFITS: ·

Clear and transparent bonding.

Quick Drying formula.

Offers excellent resistance to heat and water.

Bonds permanently.

Packed in long nozzle tubes for precise application.

Bonds a variety of substrates - glass, ceramic, earthenware, ivory porcelain, balsa wood, leathers, rubber, cork and most plastics like Acrylic, ABS polystyrene etc.

Long Shelf life - 18 months from the date of manufacturing.

Size	Description	Box Quantity	Shipper Quantity	Dimensions (in Inches)	Gross Wt (in Kgs)
10ml	QUICKFIX ADHESIVE TUBE	50	1600	19x14.5x17.7	27.00
15ml	QUICKFIX ADHESIVE TUBE	50	900	21.4x16x14.7	21.50
30ml	QUICKFIX ADHESIVE TUBE	25	600	19.3x13x21.2	25.00
100ml	QUICKFIX ADHESIVE TUBE	25	200	19.4x15x16	24.40
500ml	QUICKFIX ADHESIVE TIN	N/A	10	17.2x17.9x4.18	5.50
1 Ltr	QUICKFIX ADHESIVE TIN	N/A	10	23.3x9.5x5.2	10.80

Wembley®
SINCE 1952

SUPER GLUE CYANOACRYLATE ADHESIVE

Quickfix SuperGlue is a low viscosity, general purpose, ethyl cyanoacrylate adhesive, which is suitable for bonding a wide range of materials, instantly! On applying SuperGlue between two surfaces, a rapid polymerization occurs on its exposure to atmospheric moisture, delivering a supreme bond.

AREA OF USAGE:

Quickfix Super Glue is a specially formulated, single component, high strength adhesive for instant bonding. It bonds most non-porous substrates like plastics, rubbers, metals and porous substrates like wood, leather, etc. It is widely used in homes, offices and industry. Bonds in seconds, regardless of the material it is being used on. (Not recommended for Polyethylene, PP, Silicone Rubber, PTFE and **Styrofoam.)**





FEATURES & BENEFITS: ·

Single component - easy to use.
Instant Bonding.
Clear liquid.
Fast curing.
Bonds almost all rigid and flexible material like- rubbers, porcelain, wood, bone china, etc.
Bonds within 3-5 seconds making it popular in marble works and various such industries where high bond strength is required.
Not recommended for Polyethylene, PP, Silicone Rubber, PTFE and Styrofoam.
Long Shelf life - 12 months from the date of manufacturing.

Storage:
Product should be stored in unopened containers in a cool and dry location. | Ideal conditions for storage: cool, dry place at temperature 20-25°C. | Do Not Freeze – temperatures less than 3°C can adversely affect product properties.

Size	Description	Box Qty.	Shipper Qty	Dimensions (in Inches)	Gross Wt. (in Kgs)
12 g	QUICKFIX SUPERGLUE CYANO	25	200	15.15x11x10	6.00
20 g	QUICKFIX SUPERGLUE CYANO	25	200	15.15x11x10	7.50
50 g	QUICKFIX SUPERGLUE CYANO	10	120	14.25x13x11.5	10.00
100 g	QUICKFIX SUPERGLUE CYANO	10	40	15.1x10.5x7.1	6.50

Wembley®
SINCE 1952

DUROBOND CYANOACRYLATE ADHESIVE

DuroBond is a low viscosity, fast curing, ethyl cyanoacrylate adhesive, making it suitable for bonding applications where very fast curing time is required. It finds wide acceptance in the flex and footwear industry.

AREA OF USAGE:

DuroBond is specially formulated to achieve rapid curing, and exhibits excellent strength. Owing to its rapid setting time, it is widely used in the flex and footwear industry. It is the perfect cyanoacrylate adhesive for applications where extremely fast setting time is required. (Not recommended for Polyethylene, PP, Silicone Rubber, PTFE and Styrofoam.)





FEATURES & BENEFITS: ·

Single component - easy to use.

Instant Bonding.

Clear liquid.

Fast curing.

Exhibits excellent bonding strength.

Bonds almost all rigid and flexible material like - rubbers, wood, porcelain, bone china, etc.

Flows into the smallest cracks and corners.

Bonds within 1-3 seconds making it popular in the Flex, Footwear & Helmet Industry amongst others.

Not recommended for Polyethylene, PP, Silicone Rubber, PTFE and Styrofoam.

Long Shelf life - 12 months from the date of manufacturing.

Storage:
Product should be stored in unopened containers in a cool and dry location. Ideal conditions for storage: cool, dry place at temperature 20-25°C. Do Not Freeze – temperatures less than 3°C can adversely a ect product properties.

Size	Description	Box Qty.	Shipper Quantity	Dimensions (in Inches)	Gross Wt. (in Kgs)
12 g	DUROBOND CYANO FC	25	200	15.15x11x10	6.00
15 g	DUROBOND CYANO FC	25	200	15.5x11x10	6.50
20 g	DUROBOND CYANO FC	25	200	15.5x11x10	7.50
50 g	DUROBOND CYANO FC	10	120	14.3x13x11.5	10.00

Wembley®
SINCE 1952

SUPER GLUE HV 700 – RAPID HV GLUE

HV-700 is a high viscosity, ethyl cyanoacrylate adhesive, which is suitable for bonding a wide range of materials, easy to use and bonds within minutes. This new age glue is excellent for applications that require quick bonding solutions to deliver strong and long-lasting bonds. Its non-drip formula allows vertical applications, neat applications and negligible wastage.

AREA OF USAGE:

HV-700 Rapid Glue is a cyanoacrylate adhesive for instant bonding. It bonds Wood, WPC, Rubber, PVC, MDF Board, Mica, Flex, some Plastics, Metals, Fabrics, Marble, HDHMR, 3D Fonts, Stone and Ceramics.





FEATURES & BENEFITS: ·

High Viscosity, non-drip formulation.

Single component - easy to use.

Instant Bonding.

Clear liquid.

Bonds within minutes.

Water Resistant bonds

Achieves high bond strength once fully cured.

Not recommended for Polyethylene, PP, Silicone Rubber, PTFE and Styrofoam.

Long Shelf life - 12 months from the date of manufacturing.

Storage:
Product should be stored in unopened containers in a cool and dry location.
Ideal conditions for storage: cool, dry place at temperature 20-25°C.
Do Not Freeze – temperatures less than 3°C can adversely affect product properties.

Size	Description	Box Qty.	Shipper Qty.	Dimensions (in Inches)	Gross Wt. (in Kgs)
20 g	SUPER GLUE HV-700	25	200	16x11x10.5	8.00
50 g	SUPER GLUE HV-700	10	120	15x13x11.5	10.20
125 g	SUPER GLUE HV-700	N/A	48	13.1x10.1x9	8.50
250 g	SUPER GLUE HV-700	N/A	24	13x9.1x9.2	7.80

Wembley®
SINCE 1952

QUICKGUM & GLUPEN COLOURED SYNTHETIC GUM

GLUPEN is a non-toxic, coloured synthetic gum. It is available in 5 different colours and fragrances. It's easy to use squeezy tubes, non-toxic nature and attractive packaging makes it popular amongst kids. It delivers excellent paper to paper bonding.

AREA OF USAGE:

Bonds paper , card etc.







FEATURES & BENEFITS: ·

Used by Kids for art and craft, for paper pasting, collage work, etc.

Coloured when applied, clear on drying.

Widely used by school children for their art and craft activities.

Non-Toxic.

Safe for children.

An integral part of every office, household and classroom.

Packed in handy soft squeezable plastic bottles for easy application.

Available in five different fragrances & colours.

Size	Description	Box Qty.	Shipper Qty	Dimensions (in Inches)	Gross Wt. (in Kgs)
18 ml	GLUPEN SYN GUM SQ TUBE MIX (H)	100	1200	19x15.5x12.5	30.50
18 ml	GLUPEN SYN GUM SQ TUBE MIX (J)	30	720	17x12.5x13.5	18.50
20 ml	QUICKGUM SYN GUM SQ BTL MIX (H)	50	800	19.5x18.5x9	22.00
20 ml	QUICKGUM SYN GUM SQ BTL LIME (H)	50	800	19.5x18.5x9	22.00
20 ml	QUICKGUM SYN GUM SQ BTL MIX (J)	30	720	21x12.5x14	20.00
20 ml	QUICKGUM SYN GUM SQ BTL LIME (J)	30	720	21x12.5x14	20.00
50 ml	QUICKGUM SYN GUM SQ BTL MIX (H)	40	400	26x12x11	26.00
50 ml	QUICKGUM SYN GUM SQ BTL LIME (H)	40	400	26x12x11	26.00
100 ml	QUICKGUM SYN GUM SQ BTL LIME	12	144	13.5x13x14	19.40
200 ml	QUICKGUM SYN GUM SQ BTL LIME	6	72	18x16.5x8	18.90

Wembley®
SINCE 1952

QUICKKRAFT WHITE GLUE

QuickKraft is the ultimate craft adhesive. It is a white glue with high bonding strength and is used for substrates like cardboard, paper, polystyrene, wood and other materials. Its superior quality, attractive packaging and ease of application makes it an ideal adhesive for children, offices and households.

AREA OF USAGE:

Bonds paper, card, thermocol, mirrors, fabric, light woods like balsa, etc.





FEATURES & BENEFITS: ·

Used by Kids for art and craft, for model making, aero modelling and DIY activities.

Non – Toxic.

Widely used by school children for their art and craft activities.

Safe for children.

An integral part of every office, household and classroom.

Packed in handy soft squeezable plastic bottles for easy application.

Composition: contains PVA, vinyl acetate monomer, plasticizers and preservatives.

Size	Description	Box Qty.	Shipper Qty.	Dimensions (in Inches)	Gross Wt. (in Kgs)
10 g	QUICKKRAFT WT GLUE TUBE (H)	100	1600	22.5x14.5x10.5	26.00
20 g	QUICKKRAFT WT GLUE SQ BTL (H)	50	800	19.5x18.5x9	22.00
20 g	QUICKKRAFT WT GLUE SQ BTL (J)	30	720	21x12.5x14	20.00
50 g	QUICKKRAFT WT GLUE SQ BTL (H)	40	400	26x12x 11	26.00
100 g	QUICKKRAFT WT GLUE SQ BTL	12	144	13.5 x 13 x 14	19.40
200 g	QUICKKRAFT WT GLUE SQ BTL	6	72	18 x 16.5 x 8	18.90

wembley®
SINCE 1952

DUROFIX RUBBER BASE ADHESIVE

Durofix is a synthetic rubber based adhesive that has the ability to bond various similar and dissimilar surfaces. This quick-setting adhesive delivers high strength bonds. Duroxfinds diverse application in home and office.

AREA OF USAGE:

Durofix is a general-purpose adhesive and can be used on most materials such as leather, plastics, vinyl, rubber etc. Durofix can be used in repairing electronic goods like cameras, speaker, watches, mobile phones, auto parts etc. Durofix is also used for sticking glass to ceramic, metal, canvas etc. It is also recommended for joining rubber beading to vehicle door.





FEATURES & BENEFITS: ·

High solid contents.

Exhibits high strength on curing.

Moisture resistant.

Packed in long nozzle tubes for precise application.

Quick Drying formula.

Bonds are not rigid and have long durability.

Long Shelf life - 12 months from the date of manufacturing.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt. (in Kgs)
10 ml	DUROFIX RUB BASE TUBE	50	450	21.1x11x10	8.00
50 ml	DUROFIX RUB BASE TUBE	25	200	15x12.5x13.8	13.50

Wembley®
SINCE 1952

DUROFIX 525 RUBBER BASE ADHESIVE

Durofix is a high strength, medium viscous, synthetic rubber based adhesive which has multiple uses in Industries & DIY projects. This superior, yet cost effective product is widely used in many applications such as vinyl flooring, HVAC Ducting, Water Pipelines, Foam and Furniture, Footwear, etc. This quick-setting adhesive is easy to apply and offers all that you need. It is free from Benzene hence safe to use.

AREA OF USAGE:

Durofix is a multi-purpose adhesive and can be used on most materials such as leather, plastics, vinyl, rubber etc. Durofixis well suited for use in vinyl flowing segment, AC Ducting & Insulation, Furniture & Upholstery, Rexine, Foam to wood or Metal, HVAC Ducting, Bus body making, etc.





FEATURES & BENEFITS: ·

Easy spread ability and high coverage

Exhibits high strength on curing.

Benzene free formulation.

Efficient heat resistance.

Economical in the long run.

Bonds are not rigid and have long durability.

Long Shelf life - 12 months from the date of manufacturing.

Size	Description	Box Qty.	Shipper Qty.	Dimensions (in Inches)	Gross Wt. (in Kgs)
200 ml	DUROFIX SR525 RUB BASE TIN	15	60	19x15.5x6.2	14.00
500 ml	DUROFIX SR525 RUB BASE TIN	N/A	24	14x11x9	12.30
1 Ltr.	DUROFIX SR525 RUB BASE TIN	N/A	12	17x13.2x6	13.00
2 Ltr.	DUROFIX SR525 RUB BASE TIN	N/A	6		
5 Ltr.	DUROFIX SR525 RUB BASE TIN	N/A	4	15.5x15.5x10	21.50
25 Ltr.	DUROFIX SR525 RUB BASE TIN	N/A	1	18x11	25.00

Wembley®
SINCE 1952

DUROFIX 535 RUBBER BASE ADHESIVE

Durofix is a high strength, medium viscous, synthetic rubber based adhesive which has multiple uses in Industries & DIY projects. This superior, yet cost effective product is widely used in many applications such as vinyl flooring, HVAC Ducting, Water Pipelines, Foam and Furniture, Footwear, etc. This quick-setting adhesive is easy to apply and offers all that you need. It is free from Benzene hence safe to use.

AREA OF USAGE:

Durofix is a multi-purpose adhesive and can be used on most materials such as leather, plastics, vinyl, rubber etc. Durofix is well suited for use in vinyl flooring segment, AC Ducting & Insulation, Furniture & Upholstery, Rexine, Foam to wood or Metal, HVAC Ducting, Bus body making, etc.





FEATURES & BENEFITS: ·

Easy spread ability and high coverage

Exhibits high strength on curing.

Benzene free formulation.

Efficient heat resistance.

Economical in the long run.

Bonds are not rigid and have long durability.

Long Shelf life - 12 months from the date of manufacturing.

Size	Description	Box Qty.	Shipper Qty.	Dimensions (in Inches)	Gross Wt. (in Kgs)
200 ml	DUROFIX SR535 RUB BASE TIN	15	60	19x15.5x6.2	14.00
500 ml	DUROFIX SR535 RUB BASE TIN	N/A	24	14x11x9	12.30
1 Ltr.	DUROFIX SR535 RUB BASE TIN	N/A	12	17x13.2x6	13.00
5 Ltr.	DUROFIX SR535 RUB BASE TIN	N/A	4	15.5x15.5x10	21.50
25 Ltr.	DUROFIX SR535 RUB BASE TIN	N/A	1	18x11	25.00

Wembley®
SINCE 1952

DUROTACK SP500 -SPRAYABLE ADHESIVE

DuroTACK SP 500 is a high strength, low viscous, light-yellow coloured, fast drying sprayable adhesive synthetic rubber adhesive. It is specially designed for foam to foam bonding. It can be used for bonding variety of substrates like Foam, Painted metal, MS, FRP, PVC Foam, Rexine, Fabric &non woven carpet. For large area coverage, high strength, faster bonding. It provides excellent film forming ability on various foams; high tack and immediate bonding increase the productivity in the manufacturing.It is free from Benzene hence safe to use.

AREA OF USAGE:

DuroTACK SP500 is ideal for foam to foam bonding in the manufacturing of sofa, chair, and mattress. It can be used for automobile (rood lining, door trim, non-woven carpet application), upholstery fixing and seat making.





FEATURES & BENEFITS: ·

Sprayable and high coverage

Exhibits high strength on curing.

Benzene free formulation.

Efficient heat resistance.

Economical in the long run.

Bonds are not rigid and have long durability.

Long Shelf life - 12 months from the date of manufacturing.

Size	Description	Box Qty.	Shipper Qty.	Dimensions (in Inches)	Gross Wt. (in Kgs)
1 Ltr.	DUROTACK SP500 SPRAYABLE	N/A	12	17 x 13.2 x 6	13.00
4.5 Ltr.	DUROTACK SP500 SPRAYABLE	N/A	1		
25 Ltr.	DUROTACK SP500 SPRAYABLE	N/A	1	11 x 11 x 18	25.50

Wembley®
SINCE 1952

QUICKSEAL EPOXY PUTTY

QuickSEAL is a multi-purpose, two component epoxy putty with 4 main applications – Sealing, joining, fixing and building. Owing to its versatility and ease of application, it commonly finds application across multiple industry segments such as plumbing, auto mechanics, etc. as well as various DIY and Household applications.

AREA OF USAGE:

QuickSEAL is a versatile product that has many uses in industrial and domestic segments. It is used for sealing, joining, fixing and insulating ferrous and non-ferrous metals, glass, asbestos, concrete, ceramics etc.





FEATURES & BENEFITS: ·

Easy to use - modelling clay like consistency.

Creates a tough, long-lasting bond.

Sets in 45 – 60 minutes, allowing ample time for application.

Offers excellent electrical insulation.

Repairs permanently.

Exhibits superior strength.

Belongs in every tool box, hundreds of uses.

Can be shaped to any configuration.

Once set, can be shaped, drilled, filed, sanded, painted upon so as to suit the type of surface applied on.

Long Shelf - life of 12 months from the date of manufacturing.

Size	Description	Box Qty.	Shipper Qty.	Dimensions (in Inches)	Gross Wt. (in Kgs)
25 g	QUICKSEAL EPOXYPUTTY (J40)	40	360	17x16x6.5	10.50
25 g	QUICKSEAL EPOXYPUTTY (H20)	100	400	14.3x13.8x9	13.50
60 g	QUICKSEAL EPOXYPUTTY (J30)	30	270	20.3x18x7	20.40
90 g	QUICKSEAL EPOXYPUTTY (J30)	30	270	20.3x18x7	28.20
1 Kg	QUICKSEAL EPOXYPUTTY	N/A	24	19x12x6	25.80

Wembley®
SINCE 1952

QUICKSEAL SANITARY EPOXY PUTTY - WHITE

QuickSEAL Sanitary is a specially formulated hand kneadable two-part epoxy compound that's perfect for gaps and leakages. It blends into a soft mixture with modelling clay like consistency for ease of application, and sets at room temperature.

AREA OF USAGE:

QuickSEAL Sanitary is specially used for electrical insulation, sanitary fitting joints, gap filling applications in wash basin, aluminium sliding windows, channels and chipped concrete. In households – to close ant/cockroach holes, repairing and sealing leakages in tanks, taps, etc.





FEATURES & BENEFITS: ·

Easy to use - modelling clay like consistency.

Safe on hands.

Offers resistance to moisture, water, heat, fungus, mild acids and alkali.

Offers excellent electrical insulation.

Repairs permanently, and remains crack free after hardening and ageing.

Exhibits superior strength.

Smooth finish.

Can be shaped to any configuration.

Once set, can be shaped, drilled, filed, sanded, painted upon so as to suit the type of surface applied on.

Long Shelf-Life of 12 months from the date of manufacturing.

Size	Description	Box Qty.	Shipper Qty.	Dimensions (in Inches)	Gross Wt. (in Kgs)
50g	QUICKSEAL EPOXYPUTTY (J30)	30	270	20.3x18x7	20.40

Wembley®
SINCE 1952

QUICKTITE SATILE EPOXY ADHESIVE

QuickTITE is a high strength waterproof epoxy adhesive that is known for bonding goods for good!, QuickTite offers strong and durable bonding which are resistant to water, heat, corrosion and most chemicals. This versatile adhesive bonds anything to anything and is suited for all types of applications across the industrial and DIY sectors and is ideal for all surfaces such as stone, metal, ceramic glass, wood, rubber, etc.

AREA OF USAGE:

QuickTITE is used for bonding several similar & dissimilar materials like metal to metal, metal to wood, metal to glass, concrete, stone to concrete, etc. It is widely used in various industries like electronic equipment, sports goods, automobile sector, infrastructure, stone, construction, etc. It can also be mixed with sawdust, metal dust etc. to achieve excellent gap filling properties.





FEATURES & BENEFITS: ·

Multipurpose – bonds anything to anything.

Forms a strong, resilient and high strength bond.

Bonds are resistant to water, heat, corrosion and most chemicals.

Contains no volatile ingredients offering negligible shrinkage.

Bonds permanently.

Exhibits superior strength and excellent insulating properties.

Long Shelf - life of 24 months from the date of manufacturing.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
13g	QUICKTITE EP ADH GP TUBE 13GM	20	160	12.1x8x7.7	5.00
36g	QUICKTITE EP ADH GP TUBE 36GM	10	80	10.2x10.4x9.8	5.00
90g	QUICKTITE EP ADH GP TUBE 90GM	10	40	12.5x11x6.4	5.50
180g	QUICKTITE EP ADH GP TUBE 180GM	6	24	13.7x11x8.5	6.40
450g	QUICKTITE EP ADH GP (J) 450GM	N/A	12	17x12x10	15.30
900g	QUICKTITE EP ADH GP (J) 900GM	N/A	24	16x12.5x10.5	14.80
1.8 Kg	QUICKTITE EP ADH GP (J) 1.8KG	N/A	6	16.2x12.1x8.5	13.70

Wembley®
SINCE 1952

PV SHIELD - PVC ELECTRICAL TAPE

PV Shield is an electrical PVC tape that is fire retardant (self-extinguishing) and provides a durable, weatherproof and waterproof insulation. PV Shield has high tack ensuring long lasting and complete insulation on wiring under different usage and environment conditions.

AREA OF USAGE:

For insulating electrical wires and cables.

Joining and repairing wire slices.

Phase identification using colour-coded tapes.

Harness wrapping in panels and switchboards.

Marking pipelines, valves and equipment.

Appliance cable insulation.





FEATURES & BENEFITS: ·

ISI approved.

Fire retardant technology – self-extinguishing tape.

Available in di erent colours – black, red, green, yellow, blue & white.

High Tack tape ensuring strong adhesion.

Maintains grip even under vibration and movement.

High flexibility and stretchability, allowing it to conform easily to irregular shapes and joints.

Maintains flexibility over time without cracking.

Provides mechanical protection to wires and joints.

Resists abrasion, wear and tearing.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
6m	PV SHIELD PVC ELECTRICAL TAPE 6M	30	480	19x14.5x8.3	12.80

Wembley®
SINCE 1952

QUICKFIX P.T.F.E. TAPE

Quickfix PTFE Tape is a premium quality thread seal tape perfect for joining threaded pipes. It is self-lubricating, non-hardening, non-toxic and non-flammable tape. It fills irregular voids between threads and makes the joints easy to assemble and disassemble.

AREA OF USAGE:

Qucikfix PTFE Thread Seal Tape is used to wrap around exposed threads of pipes before screwing them in to make the joints leak proof. It lubricates, allowing deeper seating of the threads, and helps prevent the threads from seizing when being unscrewed. It finds application in both industrial and domestic plumbing on numerous substrates including Stainless Steel, Galvanized Iron and Mild Steel.





Quickfix PTFE Tape is made from 100% PTFE (Polytetrafluoroethylene)., offering excellent chemical resistance and high temperature tolerance. It is specially formulated to achieve non-sticky & low friction surface, and offers excellent sealing ability, and protects metal threads from rust and seizing. This tape is non-hardening & flexible and does not dry, crack or become brittle over time..

FEATURES & BENEFITS:

· High Density and thickness, facilitating cost-saving

· Offers excellent resistance against temperature, chemical pressure and most solvents & acids.

· Self-lubricating and insulating.

· Good gap filling ability.

· Pipes can be put to use fast and can be dismantled with ease.

· Enhances the aesthetic value of fittings.

· Enhances the reusability of pipes and fittings.

· Makes joints leak proof.

· Ideal for heated gases, high pressure equipment and hot & cold water.

Size	Description	Box Quantity	Shipper Quantity	Dimensions (in Inches)	Gross Weigh (in Kgs)
4 Mtr	QUICKFIX PTFE THREAD TAPE HD	100	1000	20.5 x 10.2 x 14.2	8.00
8 Mtr	QUICKFIX PTFE THREAD TAPE HD	100	1000	23 x 11.5 x 15.2	11.00
10 Mtr	QUICKFIX PTFE THREAD TAPE HD	250	1000	23 x 11.5 x 15.2	12.00

Wembley®
SINCE 1952

Quickfix CPVC SOLVENT CEMENT

Quickfix CPVC Solvent Cement is medium bodied, fast setting Yellow Solvent Cement for use on all schedules and classes of CPVC pipes and fittings up to 6" diameter with interference fit. MEETS ASTM F-493. Available in collapsible aluminium tubes, Tin & CO-EX jars.

AREA OF USAGE:

High Strength Solvent Cement for Residential, Commercial and Industrial hot and cold water systems up to 200 F / 93 C





FEATURES & BENEFITS: ·

Suitable for Hot & Cold water piping.

Suitable for use in all climatic conditions.

Medium Bodied Yellow Solvent cement.

Non Dripping - no loss in application.

Fast drying.

High solid content – leak proof joints.

Excellent gap filling ability.

Pipes can be put to use fast.

Available in easy to use, aluminium tubes & tin and CO-EX containers with dauber inside.

LOW – V.O.C. Solvent Cement meets California South Coast Air Quality Management District (SCAQMD) 1168/316A or BAAQMD Method 40 and various environmental requirements.

Meets performance requirements of ASTM F- 493.

Long Shelf life - 24 months from the date of manufacturing.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
5 ml	QUICKFIX CPVC SOL CEM TUBE (J)	50	450	21 x 18 x 7	6.60
10 ml	QUICKFIX CPVC SOL CEM TUBE (J)	50	450	21 x 18 x 7	9.00
20 ml	QUICKFIX CPVC SOL CEM TUBE	25	300	16 x 11.5 x 11	10.00
50 ml	QUICKFIX CPVC SOL CEM TUBE	25	200	15 x 12.5 x 13.8	13.50
50 ml	QUICKFIX CPVC SOL CEM TIN	12	144	17.5 x 13.8 x 8	13.00
100 ml	QUICKFIX CPVC SOL CEM TIN	24	144	18 x 13.5 x 12	21.20
200 ml	QUICKFIX CPVC SOL CEM TIN	24	96	22 x 17 x 9	25.00
500 ml	QUICKFIX CPVC SOL CEM TIN	N/A	12	14 x 10.5 x 5.5	6.50
1 Ltr	QUICKFIX CPVC SOL CEM TIN	N/A	12	17 x 13 x 6.5	12.50
50 ml	QUICKFIX CPVC 900 SOL CEM COEX	24	144	24.6 x 13 x 7	12
100 ml	QUICKFIX CPVC 900 SOL CEM COEX	24	144	24 x 12 x 9.5	20.60
200 ml	QUICKFIX CPVC 900 SOL CEM COEX	24	96	21.5 x 16.2 x 9.3	24.3

Wembley®
SINCE 1952

PV FIX- CLEAR SOLVENT CEMENT

PVFix is a medium bodied, High strength, Medium set, Clear solvent cement designed for all classes and schedules of UPVC/PVC pipes and fittings with interference fit schedule 40 through 6 inch (160 mm) diameter and Schedule 80 through 4 inch(110 mm) diameter, & PVC Pipes and Fittings up to 12” Diameter for non-pressure pipe. Meets ASTM D2564.

AREA OF USAGE:

High Strength formula for use in industrial & household plumbing, irrigation, DWV, Electrical conduits, pool & spa plumbing.



FEATURES & BENEFITS: ·

Suitable for use in all climatic conditions.

Medium Bodied Clear Solvent cement.

Non Dripping - no loss in application.

Medium Set – allowing sufficient working time.

Excellent gap filling ability.

Pipes can be put to use fast.


Very high solid content – ensuring leak proof joints.

Available in easy to use, collapsible aluminium tubes & tin containers with dauber inside.

Meets performance requirements of ASTM D2564.

Long Shelf life - 24 months from the date of manufacturing.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
10 ml	PVFIX SOL CEM TUBE (J)	50	450	21x18x7	9.00
20 ml	PVFIX SOL CEM TUBE	25	300	16x11.5x11	10.00
50 ml	PVFIX SOL CEM TUBE	25	200	15x12.5x13.8	13.50
50 ml	PVFIX SOL CEM TIN	12	144	17.5x13.8x8	13.00
100 ml	PVFIX SOL CEM TIN	24	144	18x13.5x12	21.20
200 ml	PVFIX SOL CEM TIN	24	96	22x17x9	25.00
500 ml	PVFIX SOL CEM TIN	N/A	12	14x10.5x5.5	6.50
1 Ltr	PVFIX SOL CEM TIN	N/A	12	17x13x6.5	12.50

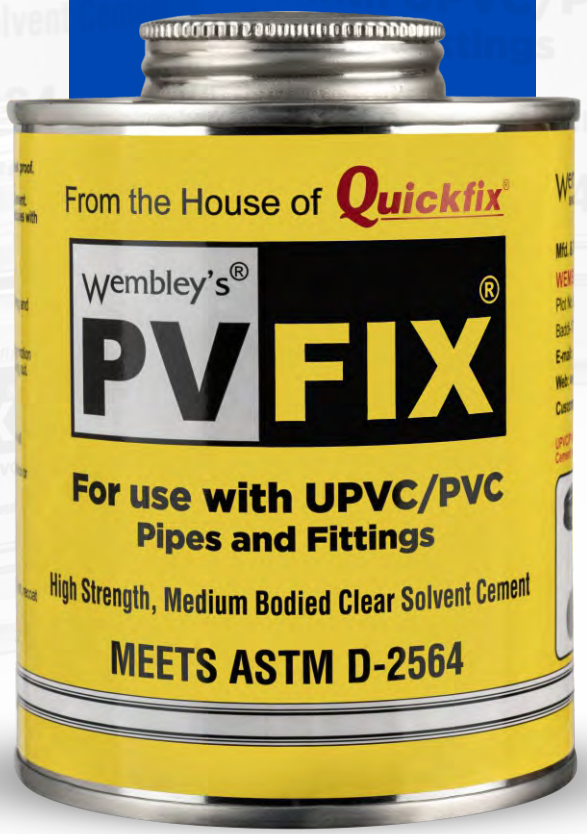

IS 14182

CM/L-9600134317

Wembley®
SINCE 1952

Quickfix PVC SOLVENT CEMENT

Quickfix PVC is a regular bodied, fast setting Clear Solvent Cement for use on all schedules and classes of PVC pipes and fittings up to 12" diameter with interference fit for non-pressure pipes. Meets ASTM D2564. ISI 14182 certified. Available in collapsible aluminium tubes, Tin & CO-EX jars.

AREA OF USAGE:

High Strength formula for joining and plugging rigid PVC pipes in Agriculture, Sewage, Household and Industrial plumbing. Recommended for potable water, non-pressure pipe, SWR/Rigid Pipes and DWV.





FEATURES & BENEFITS: ·

Suitable for cold water piping.

Suitable for use in all climatic conditions.

Regular Bodied Clear Solvent cement.

High Strength formula.

Fast Setting Formula - Pipes can be put to use fast.

High solid contents - ensuring leak proof joints.

Available in easy to use, collapsible aluminium tubes & tin and CO-EX containers with dauber inside.

ISI 14182 certified.

Meets performance requirements of ASTM D2564.

Long Shelf life - 24 months from date of manufacturing

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
20 ml	QUICKFIX PVC SOL CEM TUBE	25	300	16 x 11.5 x 11	9.60
50 ml	QUICKFIX PVC SOL CEM TUBE	25	200	15 x 12.5 x 13.8	13.00
50 ml	QUICKFIX PVC SOL CEM TIN	12	144	17.5 x 13.8 x 8	12.60
100 ml	QUICKFIX PVC SOL CEM TIN	24	144	18 x 13.5 x 12	20.30
200 ml	QUICKFIX PVC SOL CEM TIN	24	96	22 x 17 x 9	23.80
500 ml	QUICKFIX PVC SOL CEM TIN	N/A	12	14 x 10.5 x 5.5	6.10
1 Ltr	QUICKFIX PVC SOL CEM TIN	N/A	12	17 x 13 x 6.5	11.80
50 ml	QUICKFIX PVC 500 SOL CEM COEX	24	144	24.6 x 13 x 7	12.00
100 ml	QUICKFIX PVC 500 SOL CEM COEX	24	144	24 x 12 x 9.5	20.60
200 ml	QUICKFIX PVC 500 SOL CEM COEX	24	96	21.5 x 16.2 x 9.3	24.30

IS 14182

CM/L-9600134317

Wembley®
SINCE 1952

Quick GUARD – PVC SOLVENT CEMENT

QuickGUARD is a regular bodied, fast setting Clear Solvent Cement for use on all schedules and classes of PVC pipes and fittings up to 12" diameter with interference fit for non-pressure pipes. Meets ASTM D2564.

AREA OF USAGE:

High Strength formula for joining and plugging rigid PVC pipes in Agriculture, Sewage, Household and Industrial plumbing. Recommended for potable water, non-pressure pipe, SWR/Rigid Pipes and DWV.





FEATURES & BENEFITS: ·

Suitable for use in all climatic conditions.

Regular Bodied Clear Solvent cement.

High Strength formula.

Fast Setting Formula - Pipes can be put to use fast.

High solid content – ensuring leak proof joints.

Available in easy to use transparent PE Bottles.

Meets performance requirements of ASTM D2564.

Long Shelf life - 24 months from date of manufacture.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
100 ml	QUICKGUARD PVC SOL CEM BTL	10	120	19.7x12.7x10.5	14.50
200 ml	QUICKGUARD PVC SOL CEM BTL	N/A	80	20x13x10	17.50
500 ml	QUICKGUARD PVC SOL CEM BTL	N/A	36	18.6x18.5x7.1	18.50
1 Ltr.	QUICKGUARD PVC SOL CEM BTL	N/A	18	20.5x10.5x10	18.00

IS 14182

CM/L-9600134317

Wembley® SINCE 1952

Quickfix UPVC SOLVENT CEMENT - BLUE

Quickfix UPVC is a medium bodied, medium set, Blue Solvent Cement for all classes and schedules with interference fit schedule 40 through 6" diameter and schedule 80 through 4" diameter. Meets ASTM D2564. ISI 14182 certified. Available in collapsible aluminium tubes, Tin & CO-EX jars.

AREA OF USAGE:

Premium Quality, High Strength Solvent Cement formulated for use in irrigation, industrial & household piping, electrical conduit, pool & spa, plumbing and non-pressure applications. ASTM D2564.





FEATURES & BENEFITS: ·

Suitable for use in all climatic conditions.

Medium Bodied Blue Solvent cement.

Non Dripping-no loss in application.

High Strength Formula.

Medium Set - allowing sufficient working time.

High solid content - ensuring leak proof joints.

Excellent gap filling ability.

Pipes can be put to use fast.

Available in easy to use, collapsible aluminium tubes & tin and CO-EX containers with dauber inside.

ISI 14182 certified.

Meets performance requirements of ASTM D2564.

Long Shelf life - 24 months from the date of manufacturing.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
20 ml	QUICKFIX UPVC SOL CEM TUBE	25	300	16 x 11.5 x 11	10.00
50 ml	QUICKFIX UPVC SOL CEM TIN	12	144	17.5 x 13.8 x 8	13.00
100 ml	QUICKFIX UPVC SOL CEM TIN	24	144	18 x 13.5 x 12	21.20
200 ml	QUICKFIX UPVC SOL CEM TIN	24	96	22 x 17 x 9	25.00
50 ml	QUICKFIX UPVC 700 SOL CEM COEX	24	144	24.6 x 13 x 7	12.00
100 ml	QUICKFIX UPVC 700 SOL CEM COEX	24	144	24 x 12 x 9.5	20.60
200 ml	QUICKFIX UPVC 700 SOL CEM COEX	24	96	21.5 x 16.2 x 9.3	24.30

IS 14182

CM/L-9600134317


Wembley® SINCE 1952

Quickfix UPVC SOLVENT CEMENT - CLEAR

Quickfix UPVC is a medium bodied, medium set, Clear Solvent Cement for all classes and schedules with interference fit schedule 40 through 6" diameter and schedule 80 through 4" diameter. Meets ASTM D2564. ISI 14182 certified. Available in collapsible aluminium tubes, Tin & CO-EX jars.

AREA OF USAGE:

Premium Quality, High Strength Solvent Cement formulated for use in irrigation, industrial & household piping, electrical conduit, pool & spa, plumbing and non-pressure applications. ASTM D2564.

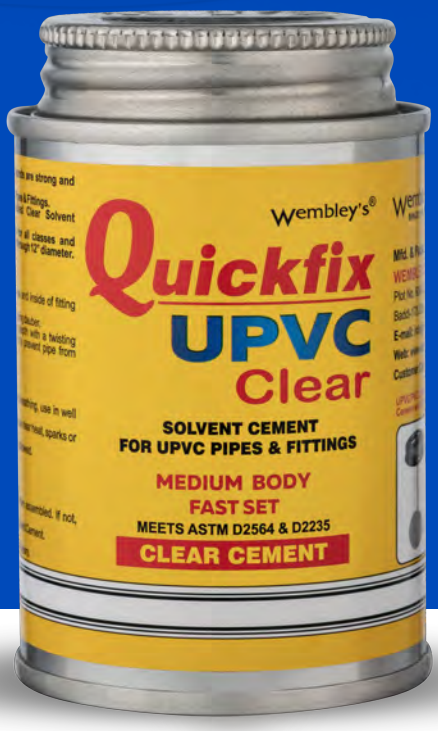



FEATURES & BENEFITS: ·

- Suitable for use in all climatic conditions.
- Medium Bodied Blue Solvent cement.
- Non Dripping-no loss in application.
- High Strength Formula.
- Medium Set - allowing sufficient working time.
- High solid content - ensuring leak proof joints.
- Excellent gap filling ability.
- Pipes can be put to use fast.
- Available in tin & CO-EX containers with dauber inside.
- Meets performance requirements of ASTM D2564.
- ISI 14182 certified.
- Long Shelf life - 24 months from the date of manufacturing.

Size	Description	Box Qty.	Shipper Qty.	Dimensions (in Inches)	Gross Wt. (in Kgs)
50 ml	QUICKFIX UPVC CLEAR SOL CEM TIN	12	144	17.5 x 13.8 x 8	13.00
100 ml	QUICKFIX UPVC CLEAR SOL CEM TIN	24	144	18 x 13.5 x 12	21.20
200 ml	QUICKFIX UPVC CLEAR SOL CEM TIN	24	96	22 x 17 x 9	25.00
50 ml	QUICKFIX UPVC CLEAR 701 SOL CEM COEX	24	144	24.6 x 13 x 7	12.00
100 ml	QUICKFIX UPVC CLEAR 701 SOL CEM COEX	24	144	24 x 12 x 9.5	20.60
200 ml	QUICKFIX UPVC CLEAR 701 SOL CEM COEX	24	96	21.5 x 16.2 x 9.3	24.30

IS 14182

CM/L-9600134317

Wembley®
SINCE 1952

CPVC BALL VALVE (NON-THREATED)

Quickfix UPVC Ball Valves find application in hot & cold plumbing systems in residential and commercial projects. These valves are also widely used in chemical processing plants, water treatment plants, industrial piping systems, water heating systems, etc for flow control as they have high temperature resistance, durability, non-corrosive nature and offer long term reliability in demanding environments.

AREA OF USAGE:

Quickfix CPVC ball valves are high-performance valves made from chlorinated polyvinyl chloride, designed to handle hot and cold water, as well as corrosive fluids. They offer excellent chemical resistance, high temperature tolerance, and are ideal for industrial plumbing and water treatment applications.





FEATURES & BENEFITS: ·

Durable Rust-Free CPVC Body, which is much stronger than UPVC.

Full bore design ensuring minimal pressure drop, and tight shutoff ensuring zero leakage.

Long handle for quick open/close, smooth operation.

High Heat Resistance, made with pure CPVC resin.

Non-Threaded for solvent weld connections.

Excellent chemical resistance, ideal for aggressive media.

Long Service Life, even in harsh conditions.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
1/2"	QUICKFIX CPVC BALL VALVE NT	N/A	240	13x20.5x12	17.30
3/4"	QUICKFIX CPVC BALL VALVE NT	N/A	120	13x19.5x13	16.80
1"	QUICKFIX CPVC BALL VALVE NT	N/A	60	12x20.5x11.5	13.30
1-1/4"	QUICKFIX CPVC BALL VALVE NT	N/A	36	12x17.5x13.5	13.40
1-1/2"	QUICKFIX CPVC BALL VALVE NT	N/A	24	14x 20x11	14.00
2"	QUICKFIX CPVC BALL VALVE NT	N/A	24	12x16x13	10.70

Wembley®
SINCE 1952

UPVC BALL VALVE (NON-THREATED)

Quickfix UPVC Ball Valves are lightweight, corrosion-resistant valves used to regulate flow in plumbing and irrigation systems. Made from unplasticized polyvinyl chloride, they offer excellent chemical resistance and durability for both residential and industrial applications.

AREA OF USAGE:

Quickfix UPVC Ball Valves find application in cold water distribution systems in residential, commercial and industrial supply lines. They are also widely used in Agricultural drip and sprinkler systems, Industrial piping, water treatment plants, water flow controls for swimming pools & spas, temporary water distribution systems at construction sites, managing flows in rainwater harvesting systems, etc.





FEATURES & BENEFITS: ·

One Piece construction for easy installation.

Full bore design for minimal flow restrictions.

Long handle for quick open/close, smooth operation.

Corrosion and chemical resistant – UPVC Body.

Non-Threaded for solvent weld connections.

Compact design and easy to install and maintain.

Long Service Life and Rust Free.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
1/2"	QUICKFIX UPVC BALL VALVE NT	N/A	196	12 x 19 x 13.5	17.50
3/4"	QUICKFIX UPVC BALL VALVE NT	N/A	120	11 x 19 x 15	16.00
1"	QUICKFIX UPVC BALL VALVE NT	N/A	72	12 x 19 x 12.5	16.00
1-1/4"	QUICKFIX UPVC BALL VALVE NT	N/A	48	12.5 x 16.5 x 14	16.00
1-1/2"	QUICKFIX UPVC BALL VALVE NT	N/A	36	16 x 10 x 16.2	17.00
2"	QUICKFIX UPVC BALL VALVE NT	N/A	20	11.5 x 19.5 x 13	14.70
2-1/2"	QUICKFIX UPVC BALL VALVE NT	N/A	8	14.5 x 19.5 x 11	12.80
3"	QUICKFIX UPVC BALL VALVE NT	N/A	4	12 x 15.5 x 11.5	8.70
4"	QUICKFIX UPVC BALL VALVE NT	N/A	4	14.5 x 18.5 x 14.5	15.70

Wembley®
SINCE 1952

QUICKPLUMB-LIQUID PIPE SEALANT

QuickPlumb is a white sealant used for joining threaded GI Pipes. It's flexibility and non-drying properties make the thread joints easy to assemble and disassemble.

AREA OF USAGE:

Used for joining and leak proofing open and concealed GI/CI threaded pipes. Remains flexible on drying, therefore joints can be dismantled easily.



FEATURES & BENEFITS: ·

Whit and non-hardening.

Fast drying with good resistance to corrosion.

Good gap filling ability.

Enhances the aesthetic value of fittings.

Makes joints leak proof.

No hard stains on hands.

Pipes can be put to use fast and can be dismantled when required.

Long shelf-life of 12 months from the date of manufacturing.



Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
20g	QUICKPLUMB LIQUID SEALENT	40	320	14.1 x 12.5 x 8.4	10.00
40g	QUICKPLUMB LIQUID SEALENT	40	320	17 x 14 x 8.1	17.00
100g	QUICKPLUMB LIQUID SEALENT	20	160	21 x 17 x 7	20.00

Wembley®
SINCE 1952

QUICKCOL WDB - SYNTHETIC ADHESIVE BINDER

QuickCol WDB is a premium quality adhesive for binding lime distemper on walls. It prevents peeling of lime and cracking. It is easy to use and requires no heating.

AREA OF USAGE:

QuickCol WDB finds application in lime wash and distemper application. It is easy to use and gives a smooth finish on walls.er.





FEATURES & BENEFITS: ·

Perfect adhesive for lime wash applications.

Add only 1 Kg in a mixture of 20kg lime and 40 ltr. Water.

Cool down the mixture before application.

High solid contents.

Strong bond – ensuring long life of white wash.

Apply 2-3 coats for good results.

Available in Easy to use laminated pouches packed in durable HDPE Buckets.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
125 g	QUICKCOL WDB SYN BINDER (BKT)	N/A	80	10.1x10.8	11.00
250 g	QUICKCOL WDB SYN BINDER (BKT)	N/A	40	10.1x10.8	11.00
500 g	QUICKCOL WDB SYN BINDER (BKT)	N/A	40	15.5x13.3	21.00
1 Kg	QUICKCOL WDB SYN BINDER (BKT)	N/A	24	15.5x13.3	25.00
1 Kg	QUICKCOL WDB SYN BINDER (DRUM)	N/A	45	23x13	47.50

Wembley® SINCE 1952

QUICKCOL WSH - SYNTHETIC RESIN ADHESIVE

QuickCol WSH is a single component PVA Emulsion Adhesive used for wood working and general bonding applications. QuickCol WSH strongly binds wood, plywood, laminates, veneers, MDF and all types of boards and cork. The bonds are strong and resistant to heat & water.

AREA OF USAGE:

Used for bonding wood, plywood, laminates, veneers, particles boards, blockboard/ hard board & MDF to each other.



FEATURES & BENEFITS: ·

- Eco-Friendly with low odour.
- Unsurpassed bonding strength.
- Easy to apply- can be applied by brush, spatula, hand roller or machine.
- Can be applied at room temperature or at high temperature.
- Resistant to water and heat.
- Gives high coverage, economical in long run.
- High solid contents.
- Strong bond – ensuring long life bonding.
- Available in Easy to use HDPE jars & in durable HDPE Buckets/Carboys.

Size	Description	Box Quantity	Shipper Quantity	Dimensions (in Inches)	Gross Weigh (in Kgs)
100 g	QUICKCOL WOOD ADHESIVE	40	80	16 x 10.11 x 7.9	11.50
250 g	QUICKCOL WOOD ADHESIVE	N/A	40	12 x 10.1 x 8.4	12.00
500 g	QUICKCOL WOOD ADHESIVE	N/A	30	19.2 x 14.1 x 5.2	17.00
1 Kg	QUICKCOL WOOD ADHESIVE	N/A	20	19 x 16.4 x 6.8	21.00
2 Kg	QUICKCOL WOOD ADHESIVE	N/A	10	23.9 x 10.5 x 8.8	22.00
5 Kg	QUICKCOL WOOD ADHESIVE	N/A	4	15 x 13.1 x 11	22.70
10 Kg	QUICKCOL WOOD ADHESIVE (BKT)	N/A	1	10.1 x 10.8	11.00
20 Kg	QUICKCOL WOOD ADHESIVE (BKT)	N/A	1	15 x 11.1	21.00
50 Kg	QUICKCOL WOOD ADHESIVE (DRUM)	N/A	1	23 x 13	52.50



Wembley®
SINCE 1952

WEMLAC PREMIUM REDUCER - HIGH GLOSS

AREA OF USAGE:

Wood furniture and polish industry – Enhances gloss and finish of NC wood lacquers.

Automotive refinishing – For thinning NC-based primers and topcoats.

Metal coating applications

Spray gun cleaning – Effectively cleans NC-based paint residues from guns and tools.

Decorative finishes – For high-gloss effects on crafts and fixtures.

Paint and coating manufacturing – Used as a solvent in NC formulations.





WemLAC High Gloss NC Thinner is a fast-drying solvent blend specially formulated for Nitrocellulose (NC) paints and lacquers. It enhances flow, improves gloss, and ensures a smooth, streak-free finish, making it ideal for

FEATURES & BENEFITS: ·

Gloss enhancing formulation that delivers a smooth and mirror-like finish

Fast evaporation rate enables quick drying of NC Coatings.

Optimized Solvent Blend ensures proper viscosity and flow.

Compatible with all NC-based paints and lacquers.

Excellent solvency power helps in uniform film formation.

Effective cleaning agent for spray guns and application tools and areas.

Reduces drying time, increasing productivity.

Improves application smoothness for brush or spray use.

Enhances final gloss and finish quality.

Economical and efficient.

Easy to handle and store, with good shelf stability.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
1 Ltr.	WEMLAC PREMIUM REDUCER	N/A	12	17.5x12x8.9	12.50
5 Ltr.	WEMLAC PREMIUM REDUCER	N/A	4	18.6x9.5x13.4	22.50
20 Ltr.	WEMLAC PREMIUM REDUCER	N/A	1	11.3x8.5x15.5	18.50

Wembley® SINCE 1952

WEMLAC PAINT STRIPPER - HEAVY DUTY

AREA OF USAGE:

· Furniture Restoration – Removes old varnish & paint from wood.

· Building renovation – cleans paint from walls, doors, metal structures, etc.

· Doors & Window Frames – strips layers without damaging the base material.

· Masonry and Concrete Surfaces – eliminates paint and graffiti.

· Automotive refinishes – removes coatings from metal panels and parts.

· Industrial Equipment – removes coatings before repainting or repairs.





WemLAC Paint Stripper is a powerful chemical formulation designed to remove old paint, varnish, or coatings from surfaces like wood, metal, and masonry. It penetrates and softens multiple layers for easy scraping or washing, making surface restoration quick and efficient.

FEATURES & BENEFITS: ·

Powerful Heavy Duty Formulation – penetrates and lifts multiple layers.

Quick Action formula – reduces waiting time for removal.

Works on various coatings – Paints, Enamels, Lacquer, Polish, Varnish, Shellac, Melamine, PU & More.

Enables easy surface preparation for repainting or refinishing.

Thoroughly cleans without sanding or grinding.

Restores original surface by removing all coatings.

Saves time and labour compared to mechanical methods.

Effectively works even in the toughest conditions.

Heavy packaging ensuring a 6-month shelf stability.

Size	Description	Box Qty	Shipper Qty	Dimensions (in Inches)	Gross Wt (in Kgs)
1 Ltr.	WEMLAC PAINT STRIPPER	N/A	12	15.5x12x8.5	15.00

Wembley® SINCE 1952

DRAINQURE INSTANT DRAIN CLEANER

AREA OF USAGE:

DrainQure is ideal for de-clogging of kitchen sinks and bathroom drains. It clears hair, soap scum, organic build up, grease, oil, food waste, etc. It is also widely used in shower and bathtub drains to prevent slow drainage and clogging. DrainQure also breaks down soft organic waste in toilet pipelines and prevents backups. It finds regular use in hotels, commercial kitchens, institutions and public restrooms for regular drain upkeep & hygiene, and to ensure smooth functioning of drainage systems.





DrainQure is a powerful chemical formulation designed to clear clogged drains by dissolving grease, hair, food particles, and organic matter. It provides fast-acting relief for blocked kitchen sinks, bathroom drains and pipelines, restoring free flow e ectively.

FEATURES & BENEFITS: ·

- Fast-acting formula offers quick relief.
- Powerful formulation that breaks down grease, hair and other organic matter.
- Granular product in single use pouches.
- Clears tough clogs without professional help.
- Restores free flow and eliminates foul odors.
- Cost effective drain maintenance solution.
- Regular use prevents future blockages.

Product 27

DRAINQURE - INSTANT DRAIN CLEANER

Size	Description	Box Quantity	Shipper Quantity	Dimensions (in Inches)	Gross Weigh (in Kgs)
40 g	DRAINQURE INSTANT DRAIN CLEANER (J)	40	360	16.7 X 16.8 X 9.6	17.00

Wembley®
SINCE 1952

TILEQURE - THE TILE CLEANING EXPERT

AREA OF USAGE:

For removing mild spots on tiling surfaces such as toilet floor and walls, kitchen areas and other tiling or ceramic surfaces. A 1:1 proportion of TileQure is recommended.

For everyday use, use 150-200ml TileQURE with half a bucket of water. It is a perfect solution for mopping the tiled area of the house.

It is recommended to use non-diluted TileQURE to get rid of stubborn stains/layers on the surface. It is recommended to patch test on a small section before using the liquid on the entire area.

It is recommended to use TileQURE tile cleaner by diluting it with water. It is a rapid-action formula that protects the colour and natural shine of the tile.





TileQURE is a high-performance tile and ceramic cleaning liquid used to get rid of yellow spots, grimes, stains, oil, wax, and moss. The product is formulated to make it fit for use on tiling floors and walls, bathrooms, toilets, and other tiling areas in domestic and commercial spaces. It is also the perfect solution for getting rid of white spots/layers in common-use areas such as bathrooms and porch areas.

FEATURES & BENEFITS: ·

TileQURE is very easy to use on tiled floors and walls and acts immediately to remove stains or grime build-up.

This tile and ceramic cleaner cleans various types of surfaces such as ceramic, porcelain & vitrified tiles, and grout.

It is not a harmful product, making it safe for use in domestic and commercial places.

Fast acting formula for high efficiency, hence reducing cleaning time.

Uses controlled acidic action to dissolve lime scale, rust and soap scum without damaging tiles.

Can be diluted with water for light cleaning or use neat for heavy duty applications.

Engineered to minimize strong chemical smells compared to raw acids.

Ensures deep and effective cleaning.T

Size	Description	Box Quantity	Shipper Quantity	Dimensions (in Inches)	Gross Weigh (in Kgs)
1 Ltr	TILEQURE TILE CLEANER BTL 1LTR	N/A	18	17 x 17 x 9	21.90
5 Ltr	TILEQURE TILE CLEANER BTL 5LTR	N/A	N/A	N/A	N/A

WEMBLEY LABORATORIES LTD.
511, Tower I, DLF Corporate Greens, Sector 74A,
Gurgaon, Haryana - 122004, INDIA.

E-mail : info@wembleysquickfix.com
Web. : www.wembleysquickfix.com
Customer Care No.: +91 8527499493